Color Chart

STOCK COLORS (PVDF FINISH)

- Black (02)
- Forest Green (11)
- Chocolate Brown (04)
- Sierra Tan (09)
- Regal Blue (18)
- Classic Bronze (01)
- Teal (19)
- Boysenberry (25)
- Rawhide (15)
- Slate Blue (21)
- Medium Bronze (03)
- Hemlock Green (30)
- Redwood (07)
- Concord Cream (05)
- Rocky Grey (16)
- Hartford Green (27)
- Patina Green (12)
- Mission Red (08)
- Almond (36)
- Siam Blue (14)
- Charcoal Grey (62)
- Slate Grey (20)
- Dove Grey (13)
- Sandstone (06)
- Bone White (26)

PREMIUM (PVDF FINISH)

- Antique Patina (24)
- Champagne (31)
- Brite Red (17)
- Coppertone (23)
- Silversmith (28)
- Titanium (35)

PREMIUM (ANODIZED)

- Clear Satin Anodized (70)
- Dark Bronze Anodized (71)

- Ascot White (10)

ACRYLIC COATED

- Acrylic Coated Galvalume® (97)

For current SRI values and agency listings, or to order color chips, please refer to our online color chart: www.atas.com/colors

THE ATAS DIFFERENCE

Rigid Wall roll former

- Stationary machine
- Controlled environment
- 20 forming stations
- In line precision leveling
- Pre-notching

ATAS International, Inc.

Allentown, PA | Mesa, AZ

610.395.8445 | www.atas.com | info@atas.com

© 2018 ATAS International, Inc.

Contact ATAS for more information. ATAS reserves the right to modify, eliminate and/or change its products without prior notification.

LRD0718 LAT207

Rigid Wall™ is a trademark of ATAS International, Inc. Kynar 500® PVDF is a registered trademark of Arkema. Hylar 5000® PVDF is a registered trademark of Solvay Solexis, Inc.

ATAS' professional staff is able to assist in the design or provide shop drawings for your project. Final choice of materials and installation is the responsibility of the owner, architect and/or the owner's agent. ATAS International, Inc. cannot be held responsible for the ultimate selection or the installation of those materials. Due to slight stress in metal materials and substrates to which metal panels are applied, installed panels may exhibit a perceived waviness in the flat areas of the panel. Commonly the period and amplitude of the waviness is dependent upon the continuous flat width of the panel. This condition is beyond the control of ATAS and consequently this perceived waviness or "oil canning" of the product is not a valid reason for rejection of materials. (Refer to ASTM E 1514, ASTM E 1637 and Metal Construction Association Technical Bulletin 1060 for further clarification). ATAS reserves the right to modify, eliminate and/or change its products without prior notification. ATAS cannot be held responsible for errors in line drawings and typesetting. Inquire for availability. Colors are as close to the actual colors as modern printing allows. Exact color chips on request; this is a requirement for all premium colors. If you have requirements or preference for colors or finishes other than shown, contact ATAS. Color availability varies by material, gauge and profile. ATAS is not responsible for colors selected from this chart. Contact ATAS for more information.

One monthly email.
One-minute signup.
Endless knowledge.

ATAS International, Inc.

Sustainable Building Envelope Technology

Bold shadow lines with mix and match capabilities

CLEAN MODERN LINES

RIGID WALL™ SERIES

RIGID WALL™ PANELS

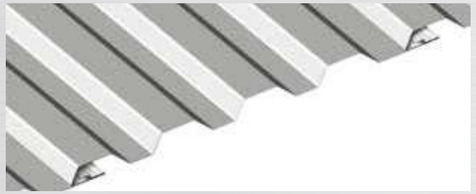

Rigid Wall is a structural wall panel, with a dramatic shadow line created by the ribs.

RIGID WALL DESIGN ADVANTAGES:

The panel can be installed vertically or horizontally with concealed fasteners over open framing or solid substrate. The direct fasteners eliminate the need for clips in the installation procedure, and provide savings on material and labor. Ideal applications are mansards, equipment screens and walls.

APPLICATION:

- Suitable for mansards, equipment screens, and walls
- Installed horizontally or vertically
- Can be installed over solid decking or open framing
- Concealed fastener system

PERFORMANCE STANDARDS:

- Tested in accordance with ASTM E 283, ASTM E 331, UL 790/ASTM E 180



Rigid Wall - MFR160

SPECIFICATIONS:

SKU:
MFR160

Material:
.032, .040, .050 aluminum
24, 22, 20*, 18* ga. metallic coated steel
24, 22*, 20*, 18* ga. 55% Al-Zn alloy coated steel with acrylic coating

Panel Width:
16" with 1 5/8" ribs

Panel Length:
Cut to customer specifications with a minimum of 6'-0", maximum to transportation limitations and/or product and project design considerations

Panel Height:
7/8"

Texture:
Embossed, Smooth

Perforations Available:
Yes

Finish:
KYNAR 500® PVDF or HYLAR 5000® PVDF

Colors:
Choice of over 30 stock colors
Custom colors available*

Anodized:
Clear Satin or Dark Bronze

Accessories:
A complete line of trims available in matching colors, gauge and finish or as specified

**Subject to minimum quantities and longer lead time. Inquire for availability.*

RIGID WALL II ™ PANELS

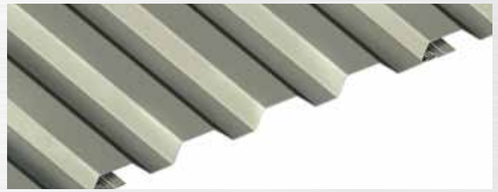

Rigid Wall II is a structural wall panel that retains the essence of the original version while providing design enhancements and eleven design options.

RIGID WALL II DESIGN ADVANTAGES:

Available in widths of 16", 12" and 8", these structural panels can be installed vertically or horizontally with concealed fasteners. This mix-and-match family of panels can be combined in various patterns to create distinctive, eye-catching facades. The locking seam is also compatible with Corra-Lok panels.

APPLICATION:

- Suitable for mansards, equipment screens, and walls
- Installed horizontally or vertically
- Can be installed over solid decking or open framing
- Concealed fastener system

PERFORMANCE STANDARDS:

- Tested in accordance with: ASTM E 84 Flame Spread
- Pre-notching available for panel overlap

SPECIFICATIONS:

SKU: MFN160, MFN161, MFN164, MFN163, MFN165, MFN167, MFN120, MFN121, MFN123, MFN080, MFN081

Material: .032, .040, .050 aluminum | 24, 22, 20*, 18* ga. metallic coated steel | 24, 22*, 20*, 18* ga. 55% Al-Zn alloy coated steel with acrylic coating

Panel Width: 8", 12", 16"

Panel Length: Cut to customer specifications with a minimum of 2'-8", maximum to transportation limitations and/or product and project design considerations

Panel Height: 7/8"

Texture: Embossed, Smooth

Perforations Available: Yes

Finish: KYNAR 500® PVDF or HYLAR 5000® PVDF

Colors: Choice of over 30 stock colors
Custom colors available*

Anodized: Clear Satin or Dark Bronze

Accessories: A complete line of trims available in matching colors, gauge and finish or as specified
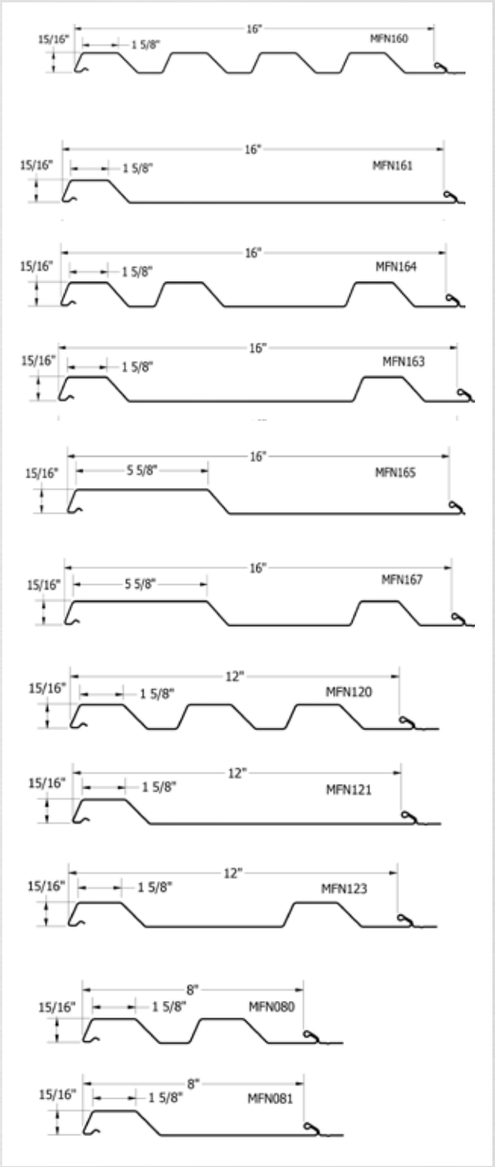
*Subject to minimum quantities and longer lead time. Inquire for availability.