

Cool square

Applique and Bollard

The most elementary shape geometry matches the most innovative technology to create this product with its ultra-modern style. COOL SQUARE derives from the Cool range, a game of solids and voids of light. Ideal for lighting effects, perfect for functional lights, the new applique and bollard versions are particularly suitable for residential and public places.





COOL SQUARE Applique and bollard

Die-cast EN AB-47100 aluminium (low copper content) housing with high corrosion resistance.
 Extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance.
 Toughened glass diffuser.
 Stainless steel screws.
 Luminaire hard wired with single neoprene cable (MICROCOOL).
 Luminaire suitable for single grommet (MINICOOL and COOL).
 Silicone gaskets.
Double powdered paint.

Colours (applique):

- White (code 01)
- Aluminium grey (code 14)

Colour (bollard):

- Aluminium grey (code 14)

Protection class
IP54

Isolation class
CLASS I ⚡

Mechanical resistance of glass
IK 06



Leds 4000K CR190 versions are available on request.

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)

REGISTERED DESIGN



Cool wall can be installed directly on the floor without flange



S.7284

FLANGE FOR MICROCOOL SQUARE BOLLARD

Steel flange with stainless steel screws (to be buried in concrete).



S.7288

FLANGE FOR MINICOOL SQUARE BOLLARD

Steel flange with stainless steel screws (to be buried in concrete).





S.7289

FLANGE FOR COOL SQUARE BOLLARD


Steel flange with stainless steel screws (to be buried in concrete).

Microcool square applique





S.7282W

With leds white **3000K** CRI90 545lm
 Rated luminaire luminous flux 204lm
 Rated input power 7W 230V

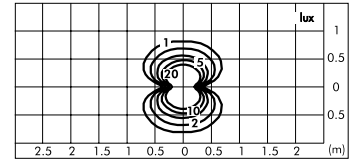


Minicool square applique





S.7281W

With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 483lm
 Rated input power 12,5W 230V

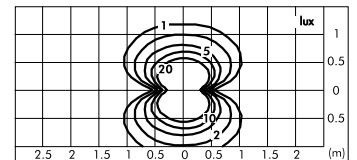


Cool square applique




S.7280W

With leds white **3000K** CRI90 2180lm
 Rated luminaire luminous flux 1177lm
 Rated input power 28,4W 230V


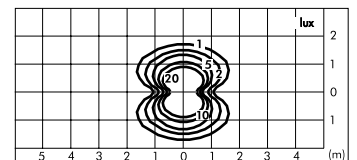


Microcool square bollard H 290 mm




S.7287W ☐

With leds white **3000K** CRI90 545lm
 Rated luminaire luminous flux 204lm
 Rated input power 7W 230V

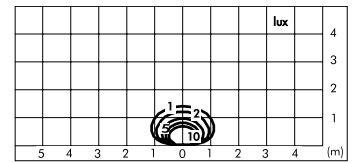



Minicool square bollard H 450 mm




S.7286W ☐

With leds white **3000K** CRI90 1090lm
 Rated luminaire luminous flux 483lm
 Rated input power 12,5W 230V

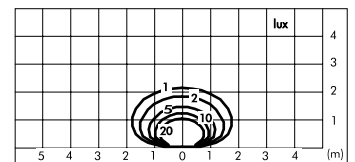

Cool square bollard H 580 mm



S.7285W ☐

With leds white **3000K** CRI90 2180lm
 Rated luminaire luminous flux 1177lm
 Rated input power 28,4W 230V

