


THE COLLECTION



3429 SUMMER MAPLE


146 x 907mm 



R10



3431 APPLE TREE


146 x 907mm 



R10



3442 EVERGREEN OAK


177 x 1212mm 



R10



3443 BUTTERNUT OAK


177 x 1212mm 



R10



3432 RICH VALLEY OAK

146 x 907mm 



R10



3439 HICKORY OAK


177 x 1212mm 



R10



3446 VINTAGE TIMBER

146 x 907mm 



R10



3436 LAUREL DARK OAK

177 x 1212mm 



R10



Micro bevel




This design intentionally features a strong pattern and/or colour variation to accurately replicate natural timber.

With regard to colour printing, it is only possible to give a provisional representation of the colour. For colour selection, an original sample should be used which we shall be pleased to supply. The stone effect tiles may include variation in markings to replicate the natural material and the wood effect products may contain knots or markings.




3437 SMOKE LIMED OAK

177 x 1212mm  

R10




3441 WHITE LIMED OAK

146 x 907mm 

R10




3438 TAN LIMED OAK

177 x 1212mm 

R10




3427 GREY MOUNTAIN ASH

146 x 907mm 

R10




3452 GREY FLAGSTONE

298 x 603mm 


R10




3455 CLASSIC YORKSTONE

298 x 603mm 

R10

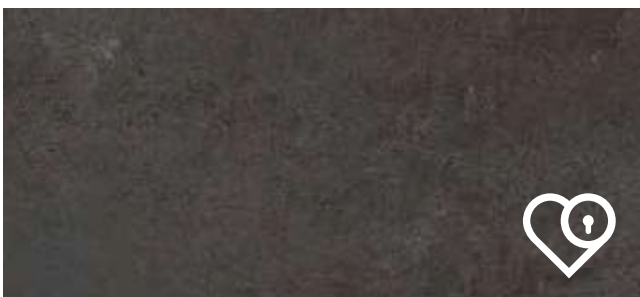

3453 BLACK SHADOW SLATE

298 x 603mm 

R10

FREE
Sample Service

It's worth remembering that if you see a colour you like you can order a free sample through our dedicated samples department at polyflor.com/samples or on +44 (0)161 767 2551

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Expona Control PUR or the Polysafe ranges.


TECHNICAL SPECIFICATION

Characteristics	Standards	CAMARO LOC
General performance	EN 649 / EN ISO 10582	Heterogeneous, PVC
Total weight	EN 430 / EN ISO 23997	7,025 g/m ²
Performance classification	EN 685 / EN ISO 10874	23 / 31
Gauge	EN 428 / EN ISO 24346	4.0mm
Wear Layer	EN 429 / EN ISO 24340	0.3mm
Packaging and plank sizes (excluding tongue & groove)	EN 427 / EN ISO 24342	15 @ 145.6 x 906.6mm = 1.98m ² 9 @ 177.4 x 1212.4mm = 1.94m ²
Packaging and tile sizes (excluding tongue & groove)	EN 427 / EN ISO 24342	11 @ 298.0 x 602.8mm = 1.98m ²
Surface Treatment		PU
Residual indentation	EN 433 / EN ISO 24343-1	≤0.05mm
Abrasion resistance	EN 649 EN ISO 10582	Group T Type I
Dimensional stability	EN 434 / EN ISO 23999	≤0.1%
Colour fastness to artificial light*	EN ISO 105-B02	level ≥ 6 method A
Behaviour to fire	EN 13501-1	Bfl - S1
Slip resistance**	EN 13893 DIN 51130 AS/NZS 4586	Class DS (dry condition) R10 R10
		For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges
Chemical resistance	EN 423 / EN ISO 26987	***
Castor chair suitability	EN 425 / ISO 4918	yes, type W, EN 12 529
Underfloor heating suitability	EN 1264-2	Suitable, max 27°C
Electrostatic properties when walked on	EN 1815	<2kV
VOC emissions	Indoor Air Comfort Gold AgBB	Eurofins certified product Very low emissions
Responsible Sourcing	BES 6001 SA 8000	Very Good Approved Factory
Environmentally preferable flooring	Polyflor Camaro Loc achieves a BRE Global Environmental A+ rating Camaro Loc is 100% recyclable and contains average 40% recycled material Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability	
Applications	Camaro Loc is ideally suited for all residential interiors as well as moderate commercial areas	

* We recommend that adequate UV protection be taken against products being installed in direct sunlight as fading may occur.

** For clarification regarding slip resistance, consult Polyflor.

*** Resistant depending on concentration and time of exposure. In case of increased impact of oils, grease, acids, alkalis and other aggressive chemicals, please contact us.



Camaro Loc is part of the new generation of luxury vinyl design flooring offering the patented LOC system.

- Adhesive free
- Quick and easy to install
- Ideal for all areas of the home
- Suitable for moderate commercial use

