


#### Overview

The IntelliFlex I/O Single Zone Wall Switch is a smart user input device that can be customized to operate roller shades, venetian blinds, or send a signal to a third-party Building Management system via the IntelliFlex I/O network. The I/O switch can be programmed to control a single system or zone, moving it to any position with a single touch. Swipe gestures are also recognized and quickly move the shades to the fully open or closed positions. Power for the switch is provided through the IntelliFlex I/O network using a single Ethernet cable for power and communication. A zone can be configured to control any number of shades on an IntelliFlex I/O network using the onboard programming buttons, without rewiring or the use of external configuration devices. Integrated LED's provide users real time system status, allowing them to know when the switch is pressed, motors are in operation, or when the switch is rendered inactive due to other system priorities.

#### Features

- Control any number of motors in an IntelliFlex I/O network
- Provides signal to Third Party System via the IntelliFlex I/O network
- Can be used with any number of intermediate stops, or no stops at all
- Integrated LEDs provide system status to users
- Standard Decora size and fits into any standard single gang box
- Fully Customizable Graphics

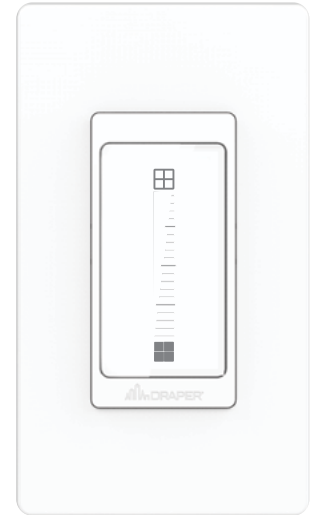

#### Compatible Components

<b>Tools</b>	<b>Motor Limit Tool</b>	PN: C202.030
<b>User Input Devices</b>	<b>Single Zone Wall Switch*</b>	PN: C112.161
	<b>Dual Zone Wall Switch*</b>	PN: C112.162
	<b>Handheld Remote</b>	PN: C156.270
<b>Network Devices</b>	<b>Network Device Connector</b>	PN: C156.267
	<b>Wireless Network Gateway</b>	PN: C156.268
	<b>AV Gateway*</b>	PN: C156.269
	<b>Contact Closure Interface*</b>	PN: C156.273
	<b>Sensor/Schedule Interface*</b>	PN: C156.272

\*One NDC is included with each of these devices

#### TECHNICAL SPECIFICATIONS

**Input:** 24V DC

**Material:** ABS plastic

**Dimensions:** 4 1/8" x 1 3/4" x 7/8"      105 x 45 x 22mm  
(without wall plate)      (without wall plate)

**Operating Temp:** Ambient

**Mounting:** Single Gang

#### Part of the IntelliFlex I/O System

**IntelliFlex I/O by Draper** is a complete control solution for motorized roller shades. Intelligent motors are connected to wall switches and other input devices through a wired network. This network allows communication between the devices and also distributes power to them from the motors, eliminating the need for external power supplies. Configuration is done from the devices themselves, with no need for a computer connection to the network. Networks can include up to 120 devices and extend to 4000 feet in total with no further restrictions on connections between components.

## IntelliFlex I/O System Overview - Single Zone Wall Switch

