




Tomorrow

Bollard and Pole top

Tomorrow is a bollard specifically developed for pedestrian areas and perfect for landscape areas as it can blend into hedges, bushes and flowerbeds. It comes with a Mid-power LED with extraordinary uniform light distribution at ground level, providing perfect homogeneous lighting without any shadows cast.

Tomorrow has very balanced and elegant proportions and is available in two different heights (45cm or 80cm).

Tomorrow is also available as a pole top, this specific model has been thought of as a retrofit solution onto existing poles and to substitute obsolete pole tops. This version can be installed onto poles of 60 mm in diam and is available in Mid-power LED for a more comfortable and soft distribution.






Private villa, Italy - Arch. Duilio Damilano © ph. Mario Bertani

TOMORROW Bollard and Pole top

Extruded EN AW-6060 aluminium profile, Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
Micro etched prismatic glass diffuser.
Stainless steel screws.
Pre-wired luminaire with neoprene cable and connector for connection in the bollard.
Silicone gaskets.
Double powder paint.

Protection class
IP65


Isolation class
CLASS II 

Mechanical resistance
IK 06

Leds 4000K CRI90 versions are available on request.
Integral DALI version available on request with Surcharge.



For the latest technical information and product updates with LED technology please refer to the website (www.simes.it)

Colour:

 Anthracite grey (code 24)

REGISTERED DESIGN

Pole h 45cm




S.2140W



MID-POWER LED **3000K** CRI90 1680lm
 Rated luminaire luminous flux 1016lm
 Rated input power 15W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics

Luminous flux wasted upward 0%.

Pole included



Pole h 80cm

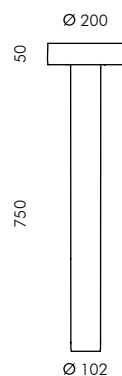


S.2141W

MID-POWER LED **3000K** CRI90 1680lm
 Rated luminaire luminous flux 1016lm
 Rated input power 15W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics

Luminous flux wasted upward 0%.

Pole included






S.2149


FLANGE FOR TOMORROW

Flange to be fixed in concrete with stainless steel screws for fixing in the ground.

TOMORROW POLE TOP \varnothing 60 mm

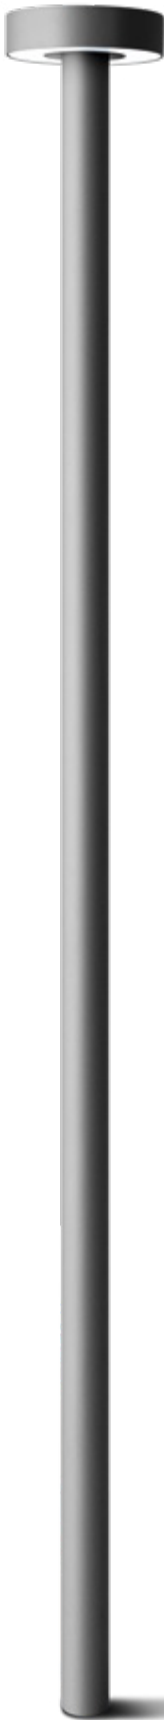



Tomorrow Post top

S.2131W 

MID-POWER LED **3000K** CRI90 3360lm
 Rated luminaire luminous flux 2033lm
 Rated input power 30W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics

Luminous flux wasted upward 0%.

Pole not included



S.2800 **S.2801**

Poles for Tomorrow

S.2800

\varnothing 60 mm CYLINDRICAL POLE TO BE BURIED

Pole total height 3000 mm

To be buried for 500 mm

Finished luminaire total height above ground 2550 mm

S.2801

\varnothing 60 mm CYLINDRICAL POLE WITH BASE

Pole total height 2500 mm

Finished luminaire total height above ground 2550 mm

