

# TERRA BAND UV


BUTYL ADHESIVE TAPE, RESISTANT TO UV RAYS

## UV RAY STABLE

The special coating guarantee heat stability, resistance to ageing and to UV rays and durability of the material

## BUTYL MIX

The special mix guarantees excellent adhesiveness and deformation capabilities, compensating for the natural movement of the wood

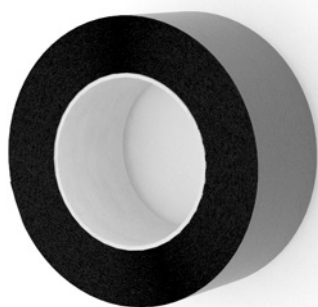

## CODES AND DIMENSIONS


CODE	B [mm]	L [m]	s [mm]	pcs.
TERRAUV75	75	10	0,8	1
TERRAUV100	100	10	0,8	1
TERRAUV200	200	10	0,8	1

B Width  
L Length

s Thickness

## TECHNICAL SPECIFICATIONS

Property	Standard	Value
Reaction to fire	EN 11925	class E
Tear strength MD/CD	EN 12311-1	185 / 200 N/50 mm
Elongation at break point MD/CD	EN 12311-1	10 / 20 %
Probe tack	ASTM D 2979	8 N
Detachment adhesion at 180°	ASTM D 1000	20 N/cm
Vertical sliding	ISO 7390	0 mm
Application temperature	-	0 / +40 °C
Temperature resistance	-	-30 / +90 °C
Watertightness	-	conform
Water vapour resistance factor ( $\mu$ )	UNI EN 1931	2720000
Solvents	-	NO
VOC emissions (COV)	-	0 % (class A+)

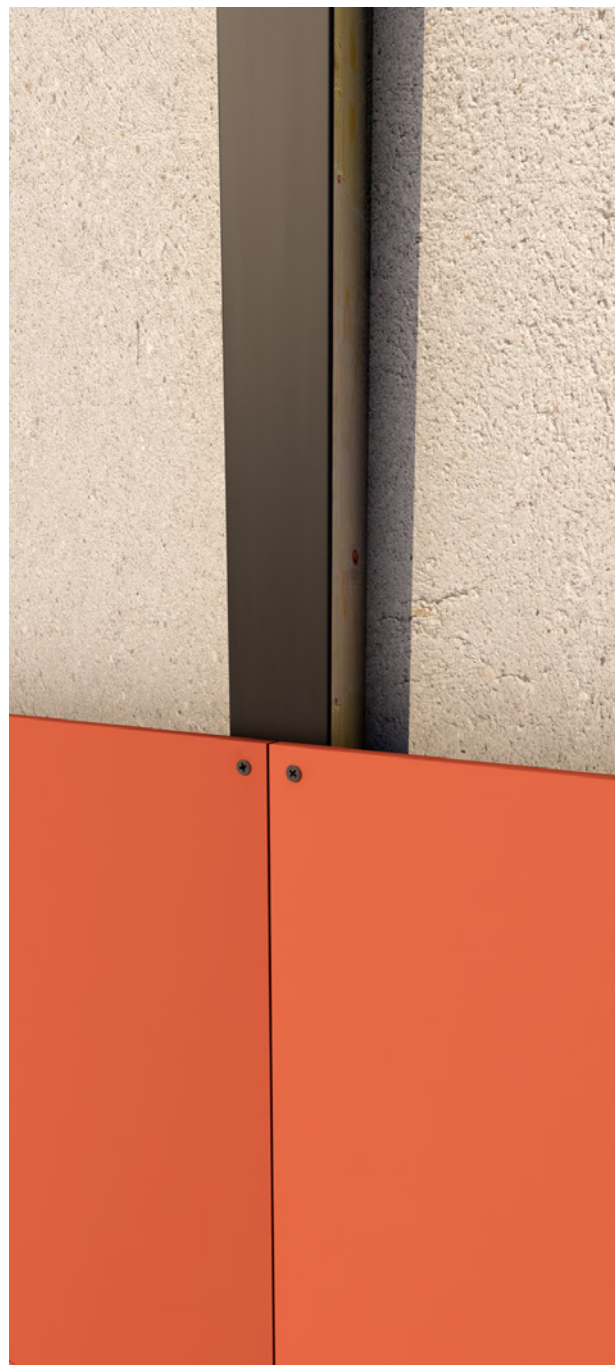

## MATERIAL

Butyl compound coated with aluminium black film and separation layer

## COMPOSITION

**separation layer:** PE film

**glue:** adhesive butyl compound

**support:** aluminium black foil, UV stable